

protankgrup

LAGITUNDUKLAGIBERISI

PROTANK T11 OFFSHORE TANKS




www.protankgrup.com

Protank T11 Offshore Tank may be used for Dangerous Goods Entries assigned with T Codes T1, T2, T3, T4, T6, and T7. This unit is designed under strict design criteria. These include but are not limited to the following:

- Offshore regulations
- IMDG Container code
- Specific data sheets
- Pressure vessel code
- Transport regulations
- Specification

Tank Technical Specification

- Pressure vessel design code is **UN IMDG**
- Maximum Working Pressure: 4 bar
- Hydrostatic Test Pressure: 6 bar
- Relief Valve Set Pressure: 4.4 bar
- Relief Valve Set Vacuum: 0.21 bar
- 6mm SS316 / SS316L construction



6mm

316/316L
STAINLESS STEEL

Tank External Finish:

- Manufacturer standard
- Client requirement



Minimum Design Temperature: -20 Deg C Maximum Design Temperature: 65Deg C

*Note: The vessel and frame material are based on the above operational temperature range



Frame Technical Specification

- Certified to DNV2.7-1 /EN ISO 10855-1/2
- Frame material: Carbon steel

Frame External Finish

- Manufacturer standard
- Client requirement



Protank T-11 IMDG / Chemical Tank Configuration

Unit Type	Tare	Payload	MGW	Dimensions (mm)		
Nominal	kg	kg	kg	L	W	H
2900 Litre	1800	4700	6500	1995	1995	2300
4000 Litre	2000	6000	8000	1995	1995	2570
4800 Litre	2100	7900	10000	2200	2000	2570

Standard configuration

- 2" Bottom outlet valve
- 1" Airline ball valve
- Pressure-vacuum relief valve
- Manlid
- Inspection hatch
- Dipstick and dipstick access
- Walkway and ladder
- Nameplate and information marking
- Tubular document box

Approvals

- IMDG
- ADR
- RID
- DNV 2.7-1
- EN ISO10855-142
- IMO Circular MSC/Circ.860



Bottom Outlet Valve



Pressure-Vacuum Relief Valve



Airline Ball Valve



Ladder



Nameplate



Walkway




Tubular Document Box




Dipstick & Dipstick Access

Optional Accessories

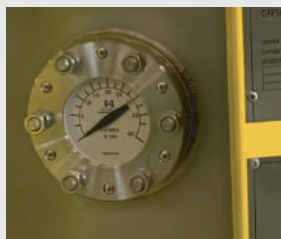

Float Dial
Level Gauge
(Leak Proof)

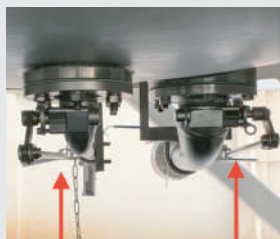

Cap437 Double
Bottom Outlet
for Aviation Fuel



Magnetic
Level Gauge



Fall Arrestor


Safety Features



Wire Gauze At PVRV



Safety Decals

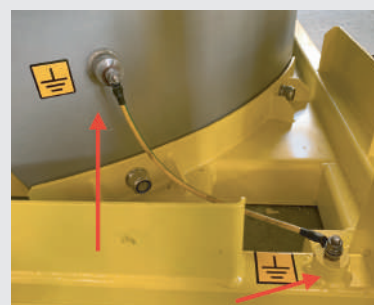

Earthing Boss

Contact Us

For Your Liquid Handling Needs

Corporate Office

Protankgrüp

No. 14 & 16, Jalan Bulan U5/172, Subang 2,
Industrial Park, 40150, Shah Alam,
Selangor, 40150, Malaysia

Tel: +603 7847 1946

Fax: +603 7846 6702

Email: enquiry@protank.com.my

Sales & Rental

Tankquip Resources Sdn Bhd

Email: enquiry@tank-quip.com

protankgrüp
LAGITUNDUK LAGI BERISI

Singapore

Nila Premier Pte Ltd

1 Coleman Street #05-13A

The Adelphi Singapore 179803

hazrag@protank.com.my

Indonesia

Jalan Keramat Sentiong V,
No136B jakarta 10450.

Indonesia

daniel@tank-quip.com

Thailand

(Yard #2A) 15/15 Moo 2,
Tambol Ching-ko, Amphur
Singhanakorn, Songkhla
90280

ismahadi@tank-quip.com

www.protankgrup.com